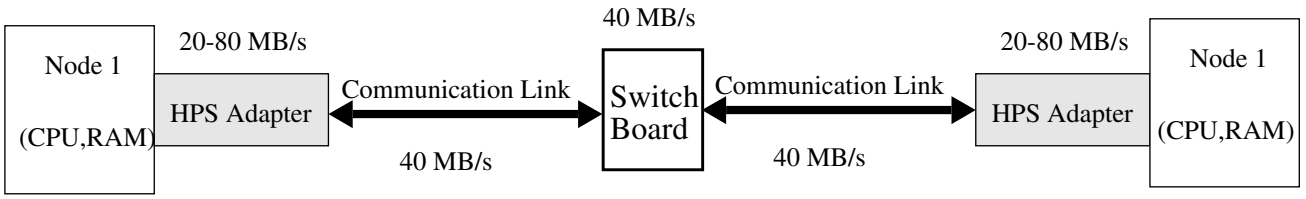
40 MB/s
Node 1
(CPU,RAM)
20-80 MB/s
HPS Adapter
Communication Link
40 MB/s
Switch
Board
Communication Link
40 MB/s
20-80 MB/s
HPS Adapter
Node 1
(CPU,RAM)